


POH conduit is impact resistant due to its wall thickness and is suitable for installation in harmful areas.

## CORRUGATED TUBE

# POH

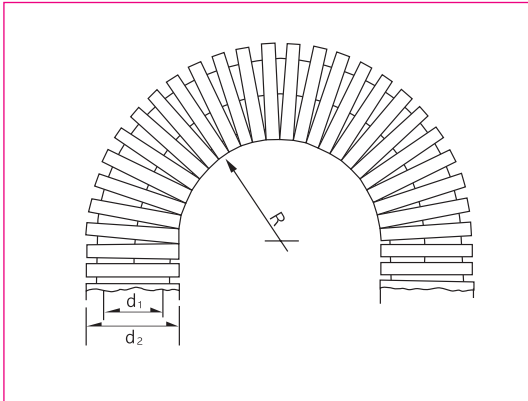

- **Material:** High Quality Polyamide6
- **Construction:** Inside & Outside Corrugated all Plastic Hose
- **Protective:** IP 68 acc.EN 60529
- **Temperature Range:** -40°C to + 105°C
- **Short Term:** up to +150°C
- **Self-Extinguishing:** UL94-Vo, Halogen-Free
- **Color:** Black & Gray
- **Connections:** CPSFIX
- **Application:** Machine tool, Plant Construction Crane and Heavy Machine etc.
- **International Specification:**

- **재 질:** 고품질 폴리아미드6
- **구 조:** 내/외부 굴곡플라스틱 호스
- **방 수 등 급:** IP 68 acc.EN 60529
- **적용온도범위:** -40°C + 105°C
- **순간최대온도:** +150°C
- **자기소화성:** UL94-Vo, Halogen-Free
- **색 상:** 검정색, 회색
- **사용 커넥터:** CPSFIX
- **적 용:** 공작기계, 플랜트 구조물 크레인, 대형기계 등
- **국 제 규 격:**

Dimensions in mm

품 번			최소내경 Inner Diameter (d1)	외 경 Outer Diameter (d2)	최소곡률반경 Bending Radius (R)mm ± 10%	포장단위 Packing meter/roll
Order No.	Black	Gray				
POH-07B	POH-07G	POH-07U	6	10	20	50/100
POH-10B	POH-10G	POH-10U	9	13	25	50
POH-12B	POH-12G	POH-12U	11.5	15.8	35	50
POH-16B	POH-16G	POH-16U	15.5	21.2	45	50
POH-22B	POH-22G	POH-22U	21.3	28.5	50	50
POH-28B	POH-28G	POH-28U	26.8	34.5	60	50
POH-36B	POH-36G	POH-36U	35.2	42.5	70	30
POH-48B	POH-48G	POH-48U	46	54.5	80	30